



KuPower

HIGH EFFICIENCY MONO MODULE

CS3K-300|305|310|315MS

With Canadian Solar's industry leading mono-PERC cell technology and the innovative LIC (Low Internal Current) module technology, we are now able to offer our global customers high power mono modules up to 315 W.

The KuPower mono modules with a dimension of 1675 x 992 mm, close to our 60 cell SuperPower modules, have the following unique features:


- Higher power classes for equivalent module sizes
- High module efficiency up to 18.96 %
- LOW hot spot temperature risk
- LOW temperature coefficient (Pmax): -0.37 % / °C
- LOW NMOT (Nominal Module Operating Temperature): 42 ± 2 °C



More power output thanks to low NMOT: 42 ± 2 °C



Low power loss in cell connection



Safer: lower hot spot temperature



Heavy snow load up to 5400 Pa, wind load up to 2400 Pa*



linear power output warranty



product warranty on materials and workmanship

PRODUCT CERTIFICATES**

IEC 61215 / IEC 61730: 2005 & 2016: VDE / CE / UL 1703: CSA




* For detailed information please refer to Installation Manual.


** Please contact your local Canadian Solar sales representative for the specific product certificates applicable in your market.

ENGINEERING DRAWING (mm)


Rear View

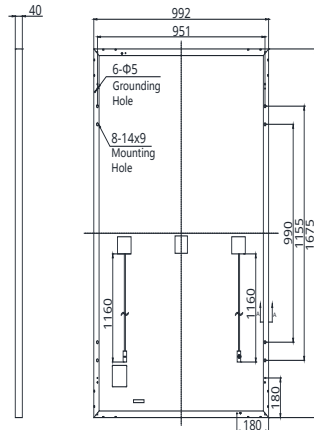


Frame Cross Section A-A



Mounting Hole



CS3K-305MS / I-V CURVES

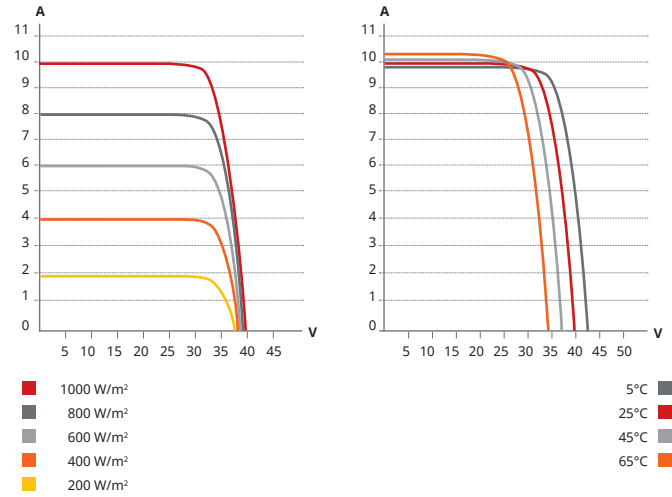

ELECTRICAL DATA | STC*

CS3K	300MS	305MS	310MS	315MS
Nominal Max. Power (P _{max})	300 W	305 W	310 W	315 W
Opt. Operating Voltage (V _{mp})	32.5 V	32.7 V	32.9 V	33.1 V
Opt. Operating Current (I _{mp})	9.24 A	9.33 A	9.43 A	9.52 A
Open Circuit Voltage (V _{oc})	39.3 V	39.5 V	39.7 V	39.9 V
Short Circuit Current (I _{sc})	9.82 A	9.90 A	9.98 A	10.06 A
Module Efficiency	18.05 %	18.36 %	18.66 %	18.96 %
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1000 V (IEC / UL)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	30 A			
Application Classification	Class A			
Power Tolerance	0 ~ + 5 W			

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

MECHANICAL DATA

Specification	Data
Cell Type	Mono-crystalline, 156.75 × 78.38 mm
Cell Arrangement	120 [2 × (10 × 6)]
Dimensions	1675 × 992 × 40 mm (65.9 × 39.1 × 1.57 in)
Weight	18.5 kg (40.8 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 diodes
Cable	4.0 mm ² & 12 AWG, 1160 mm (45.7 in)
Connector	T4 (IEC / UL)
Per Pallet	27 pieces
Per Container (40' HQ)	756 pieces

ELECTRICAL DATA | NMOT*

CS3K	300MS	305MS	310MS	315MS
Nominal Max. Power (P _{max})	223 W	227 W	230 W	234 W
Opt. Operating Voltage (V _{mp})	29.6 V	29.8 V	30.0 V	30.2 V
Opt. Operating Current (I _{mp})	7.54 A	7.62 A	7.67 A	7.75 A
Open Circuit Voltage (V _{oc})	36.8 V	37.0 V	37.2 V	37.4 V
Short Circuit Current (I _{sc})	7.92 A	7.98 A	8.05 A	8.12 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (P _{max})	-0.37 % / °C
Temperature Coefficient (V _{oc})	-0.29 % / °C
Temperature Coefficient (I _{sc})	0.05 % / °C
Nominal Module Operating Temperature	42 ± 2 °C

PARTNER SECTION



The aforesaid datasheet only provides the general information on Canadian Solar products and, due to the on-going innovation and improvement, please always contact your local Canadian Solar sales representative for the updated information on specifications, key features and certification requirements of Canadian Solar products in your region.

Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.